

NH-ALSF TRACT NO. 2-16

Lumberjack Pine

Vilas County

Town 42 North, Range 7 East

Section 23 – NENE, SENE, NENW

**LUMP SUM SALE** - 50% of the bid value must be paid before harvesting begins.

15% of the total sale bid value or \$1,000.00, whichever is greater, will be required for performance bond.

The cutting area is approximately 12 acres.

The contract period is 2½ years.

All trees that will yield one or more 100-inch sticks to the minimum 4" top diameter will be cut and utilized.

Whole tree utilization is not allowed.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>	<u>Advertised Price</u> <u>Per Unit</u>
White Pine <sup>1</sup>	95		\$ 18.20
Red Pine <sup>2</sup>	460		\$ 21.90
		<b>Total Minimum Bid Value</b>	<b>\$ 11,803.00</b>

---

<sup>1</sup>Contains approximately 14 MBF and 23 tons pulpwood.


<sup>2</sup>Contains approximately 50 MBF and 181 tons pulpwood.

The total sale volume equates to approximately 46.2 tons/acre or 19.3 cords/acre.

Special Conditions.

- LUMP SUM SALE:** 100% of the total lump sum bid value must be paid prior to cutting. All unmarked or undesigned operational trees require approval before cutting. All operational or damaged trees will be decked for scaling and will be billed in addition to the original sale amount at the stumpage rate which was bid. Any trees cut without prior approval will subject the contractor to penalties and fines. **While every effort was made to accurately cruise this timber sale, the above volume estimate will likely vary from the amount actually harvested. The bidder is responsible for cruising the sale area and placing a bid based upon what they determine is their estimate of the volume present. Cruise data for this sale is available upon request.**
- The contractor is responsible for trimming the trees over and along the Lumberjack Trail in order to prevent damage to the logging trucks. The resulting slash must be lopped and/or scattered to lie within two feet of the ground and pulled back at least 10 feet behind the tree line concurrently with cutting.
- The contractor is responsible for grading and leveling the Lumberjack trail when logging operations are completed.
- Biomass Harvesting is not allowed. Do not cut, knock down, or utilize dead trees unless the tree poses a safety hazard during harvesting operations.
- All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
- Do not operate equipment within 15 feet of wetlands unless during frozen ground conditions.

**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TIMBER SALE  
TRACT 2-16 LUMBERJACK PINE  
T42N R7E SECTION 23  
HARVEST ACRES - 12**

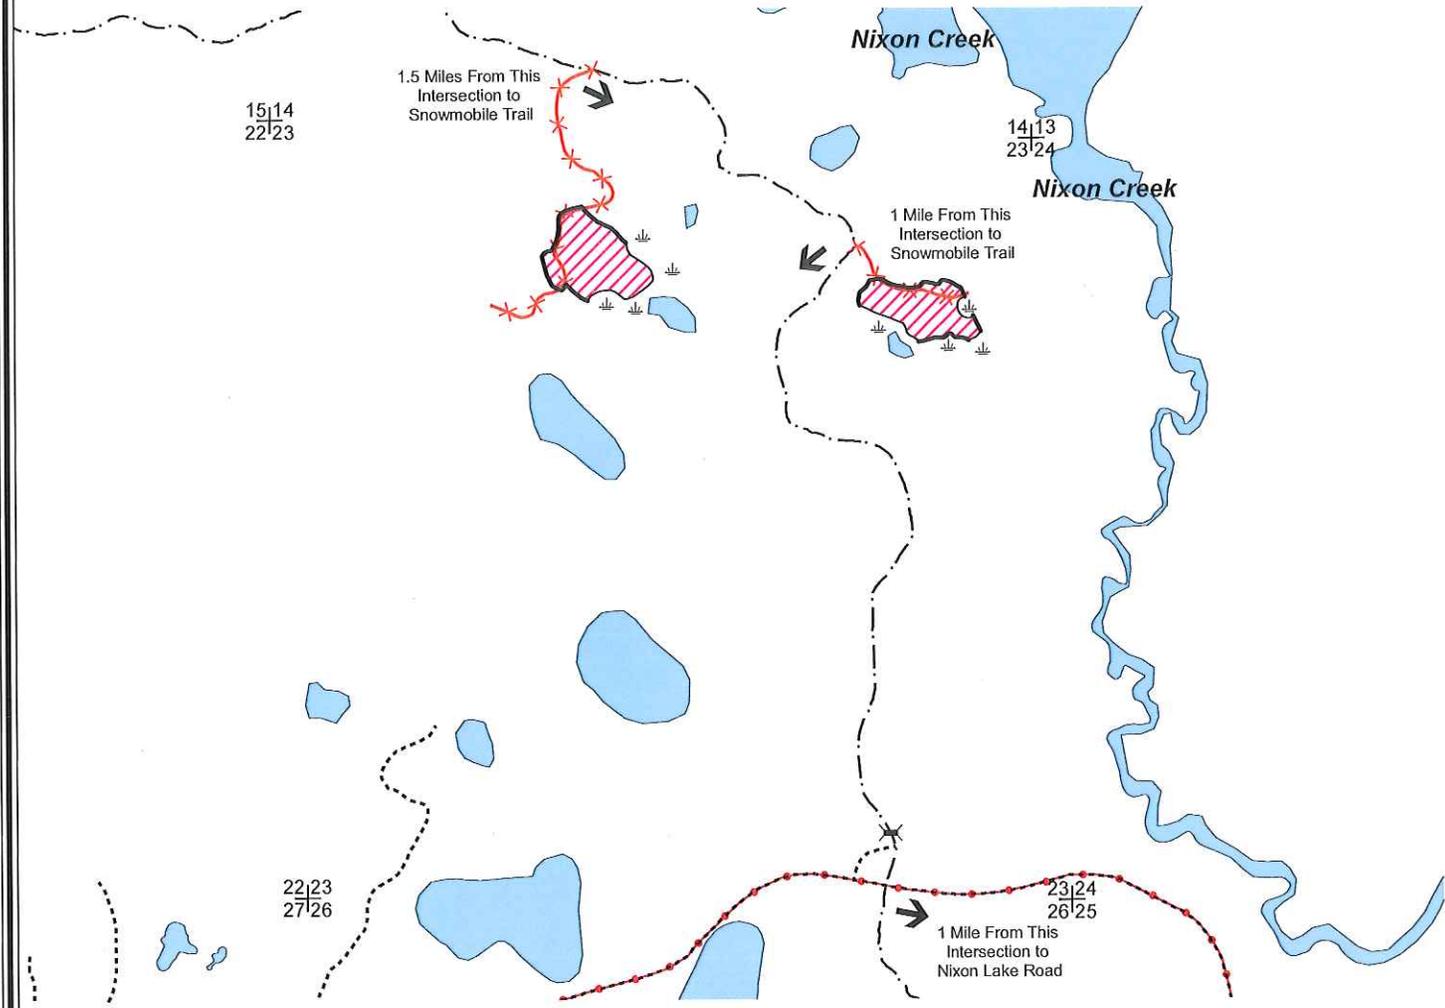

**Legend**

- Gates
- Section Corner
- Keg/Swamp
- Red Line
- Woods Roads
- Overgrown Woods Road
- Lumberjack Recreation Trail
- Snowmobile Trails
- Lakes

Pine Area (12 Acres): Cut all pine marked with BLUE paint.

**Seasonal Restriction: Harvesting and Hauling allowed from between May 1 through December 15 only.**

**Note: Trucking access south of the gate is via the Woods Road and NOT the Recreation Trail.**

All stands are within Mgmt. Area 3:  
Vilas Sandy Plains North -  
Forest Production Area

N

Scale: 4" = 1 Mile  
1:15,840

Map produced by  
Todd Anderson &  
Paul Schultz, 2/16