



Aerial photograph from above Lake Winnebago facing west across the City of Oshkosh and a portion of the source water area (Courtesy of the Carl Guell Slide Collection)

Source Water Assessment for Oshkosh Waterworks

Oshkosh, Wisconsin

March 14, 2003

A report by the
Wisconsin Department of Natural Resources
Bureau of Drinking Water and Groundwater



Table of Contents

SUMMARY 2

PURPOSE OF THIS ASSESSMENT 3

SOURCE WATER CONTAMINANT CATEGORIES 4

HYDROLOGIC SETTING 5

 DESCRIPTION OF THE SOURCE WATER AREA 5

 DESCRIPTION OF LAKE WINNEBAGO 10

SUSCEPTIBILITY ASSESSMENT 10

 METHODOLOGY 10

 SENSITIVITY ANALYSIS 11

 POTENTIAL CONTAMINANT SOURCE INVENTORY 11

DESCRIPTION OF OSHKOSH WATER TREATMENT SYSTEM 24

SUSCEPTIBILITY DETERMINATION 24

RECOMMENDATIONS 24

SELECTED REFERENCES 25

Summary

The 1996 amendments to the Safe Drinking Water Act require that states complete source water assessments for all public drinking water systems. The primary purpose of this assessment is to determine the relative susceptibility of Oshkosh's source water to contamination. For this assessment, susceptibility is defined as the likelihood that a contaminant of concern will enter a public water supply at a level that may result in adversely impacting human health. Source water is untreated water from streams, rivers, lakes, and groundwater aquifers. A susceptibility determination is based on a stepwise synthesis of information regarding the well or surface water intake vulnerability and the source water's sensitivity to a potential source of a contaminant of concern.

Affordable, safe drinking water is essential to the health, development and stability of all communities. Conventionally, treatment has been the only step in maintaining safe drinking water for surface water systems. The quality and cost of treated drinking water is in part a function of the pretreatment water quality. In the past little concern has been paid to a preventive approach of protecting the source water. One of the best ways to ensure safe drinking water is to develop a local program designed to protect the source of drinking water against potential contamination. Not only does this add a margin of safety, but it also raises the awareness of consumers and/or the community of the risks of drinking water contamination. It is expected that source water assessment results will provide a basis for developing a source water protection program.

The City of Oshkosh is located in East Central Wisconsin at the Upper Fox River's discharge into Lake Winnebago. Oshkosh's more than 63,000 inhabitants rely solely on Lake Winnebago for their source of public drinking water.

A source water area is the area that contributes source water to the public drinking water system. Located in East Central Wisconsin, Oshkosh's delineated source water area is over 5,700 square miles. Oshkosh's source water area includes all land drained by Lake Winnebago. Soils, topography, land cover and water quality in the source water area vary widely. Generally, the western and northern portions of the source water area have relatively permeable hilly, sandy and rocky soils with high percentages of natural vegetative land cover. The eastern and southern regions of the source water area have relatively less permeable, flat, clayey soils with higher percentages of agricultural and urban land coverage. These differences create varying water quality in the source water area. Streams in the western and northern portions of the source water area generally have higher water quality than streams in the eastern and southern portions.

Historically, Oshkosh Waterworks has reliably provided high quality drinking water to its customers. There is an average water demand of 7.5 million gallons per day (mgd). Their facility has a maximum capacity of 16 mgd. The treatment process involves flocculation, sedimentation, filtration, ozonation, granular activated carbon filtration, chlorination and fluoridation.

This assessment determined Oshkosh's source water has a relatively high susceptibility to contamination and is significantly impacted by the source water area. This is due to the distribution of land uses and potential contaminant sources in the source water area along with the shallow depth and turbid nature of Lake Winnebago. The physical characteristics of Lake Winnebago and the high concentrations of urbanized and agricultural land make Oshkosh's source water particularly susceptible to microbial, volatile organic and synthetic organic compound contamination.

Source water protection should begin with the formation of a source water protection team composed of delegates from private parties and local, regional, state and federal organizations. This group is needed to coordinate and implement best management practices in the source water area to prevent source water contamination. Protection efforts should first focus on preventing urban and construction site runoff from urban areas near Lake Winnebago and controlling agricultural runoff from the eastern and southern portions of the source water area.

A hard copy of the detailed assessment is available at the Oshkosh Public Library. An electronic file of the detailed assessment along with other information concerning source water assessments is accessible on the Wisconsin Department of Natural Resources website at <http://www.dnr.state.wi.us/org/water/dwg/gw/SWP.HTM>.

Introduction

In 1996, the U.S. Congress amended the Safe Drinking Water Act to provide resources for states to conduct source water assessments. Information about Wisconsin's Source Water Assessment Program can be found on the Wisconsin Department of Natural Resources (WDNR) website mentioned previously. The WDNR has developed a method explained in Wisconsin's Source Water Assessment Program for conducting Source Water Assessments for water supplies that use surface water. A source water assessment involves identifying a source water area, analyzing the sensitivity of the source to natural conditions, conducting potential contaminant source inventories and determining the susceptibility of the source to contamination.

The requirements for public water supplies in Wisconsin to meet U.S. Environmental Protection Agency maximum contaminant levels (MCLs) provide a base level of assurance of safe drinking water. However, all systems are vulnerable to some degree to potential contamination. With this in mind, susceptibility determinations were made qualitatively relative to other systems.

Purpose of this Assessment

Safe, affordable drinking water is essential to the health, development and stability of all communities. Conventionally, treatment has been the only step in maintaining safe drinking water for surface water systems and little concern has been paid to a preventive approach of protecting the source water. The quality and cost of treated drinking water is often a function of pretreatment source water quality. The purpose of this source water assessment is to determine the susceptibility of Oshkosh's source of drinking water to contamination and to make recommendations on how to help protect this valuable resource.

Source water quality can be improved through the implementation of a source water protection program. A source water protection program is composed of four steps: assessment, planning, implementation and long term management. By assessing localized impacts on source water quality, this assessment completes the first step in a source water protection program. For more information on completing a source water protection program please visit <http://www.epa.gov/safewater/protect/protect.html> on the World Wide Web.

Source Water Contaminant Categories

Source water can be contaminated by microbial, inorganic, synthetic organic, volatile organic, precursors of disinfection by-products and radioactive contaminants. These contaminants can enter source water through various means. Pathways of contamination can be split into two major categories, point source pollution and nonpoint source pollution. Point source pollution includes specific, identifiable dischargers of contaminants. Examples of these include industrial and municipal wastewater outfalls. Point source dischargers are more easily regulated and held accountable for contaminating source water. Nonpoint source pollution comes from no specific source and diffusely enters source water. Examples of nonpoint source pollution include runoff from land cover and atmospheric deposition.

This assessment describes the following general contaminant categories associated with potential contaminant sources. For a more detailed description of contaminants associated with potential contaminant sources please visit <http://www.epa.gov/OGWDW/swp/sources1.html> on the World Wide Web. For information on health effects and methods of protection from particular chemical contaminants please visit <http://www.epa.gov/safewater/hfacts.html> on the World Wide Web.

- *Microbial contaminants*, such as viruses and bacteria, which may come from, among other sources, sewage treatment plants, septic systems, agricultural livestock operations, and wildlife. Microbial contaminants can lead to widespread acute illnesses in customers of a contaminated drinking water system. Examples of microbial contaminants include *Giardia*, *Cryptosporidium* and *E. coli*.
- *Inorganic contaminants*, such as salts and metals, which can occur naturally or result from among other sources, urban storm water runoff, industrial or domestic wastewater discharges, oil and gas production, mining, or farming. Among other detrimental health effects, inorganic contaminants can negatively impact various organs and the circulatory system in the human body. Some examples of inorganic contaminants include nutrients such as nitrogen and phosphorous and heavy metals such as cadmium, lead and mercury.
- *Synthetic organic contaminants*, such as industrial products, pesticides and herbicides, which may come from a variety of sources such as agriculture, storm water runoff, industrial activities, landfills, wastewater treatment facilities and residential areas. As well as being carcinogenic, synthetic organic contaminants can negatively impact the nervous system, liver and kidneys and affect development. Some examples of synthetic organic contaminants include pesticides such as atrazine and alachlor, as well as industrial products such as polychlorinated bi-phenyls (PCBs).
- *Volatile organic contaminants*, such as petroleum products, solvents, cleaners and degreasers, which may come from industrial activities, petroleum production, gas stations, urban storm water runoff, wastewater treatment facilities and septic systems. As well as being carcinogenic, volatile organic contaminants can negatively impact the nervous system, liver and kidneys and affect development. Some examples of volatile organic contaminants include benzene, vinyl chloride and styrene.
- *Precursors of disinfection by-products* lead to the formation of carcinogenic byproducts during source water treatment. Likely sources of dissolved organic carbon are from agricultural and urban storm water runoff. Some examples of precursors of disinfection by-products include dissolved organic carbon and bromide.
- *Radioactive contaminants*, can be naturally occurring or be the result of oil and gas production and mining activities. Radioactive contaminants are carcinogenic. Some examples of radioactive contaminants include radium and uranium.


Hydrologic Setting

Description of the Source Water Area

Source water areas were assigned to specific surface water intakes based on proximity of drainage basins and potential affect on source water quality at the intake. Source water areas for this assessment were delineated based on Wisconsin DNR surface watersheds, not groundwater basins. Generally, groundwater basin boundaries are similar to their surface water counterparts but may vary due to geology.


As shown in Figure 1, Oshkosh's source water area is located in east central Wisconsin. It includes all or portions of Fond du Lac, Western Calumet, Winnebago, Green, Marquette, Northern Columbia, Eastern Adams, Waushara, Western Outagamie, Waupaca, Eastern Portage, Shawano, Eastern Marathon, Menominee, Langlade, Southeastern Oneida and Southwestern Forest Counties. Larger municipal areas encompassed at least partially by the source water area include Oshkosh, Fond du Lac, Neenah, Portage, Menasha, Crandon, Berlin, Shawano, Waupaca, Ripon, New London and Clintonville. Oshkosh's source water area is over 5,700 square miles.

Figure 1: Source Water Area

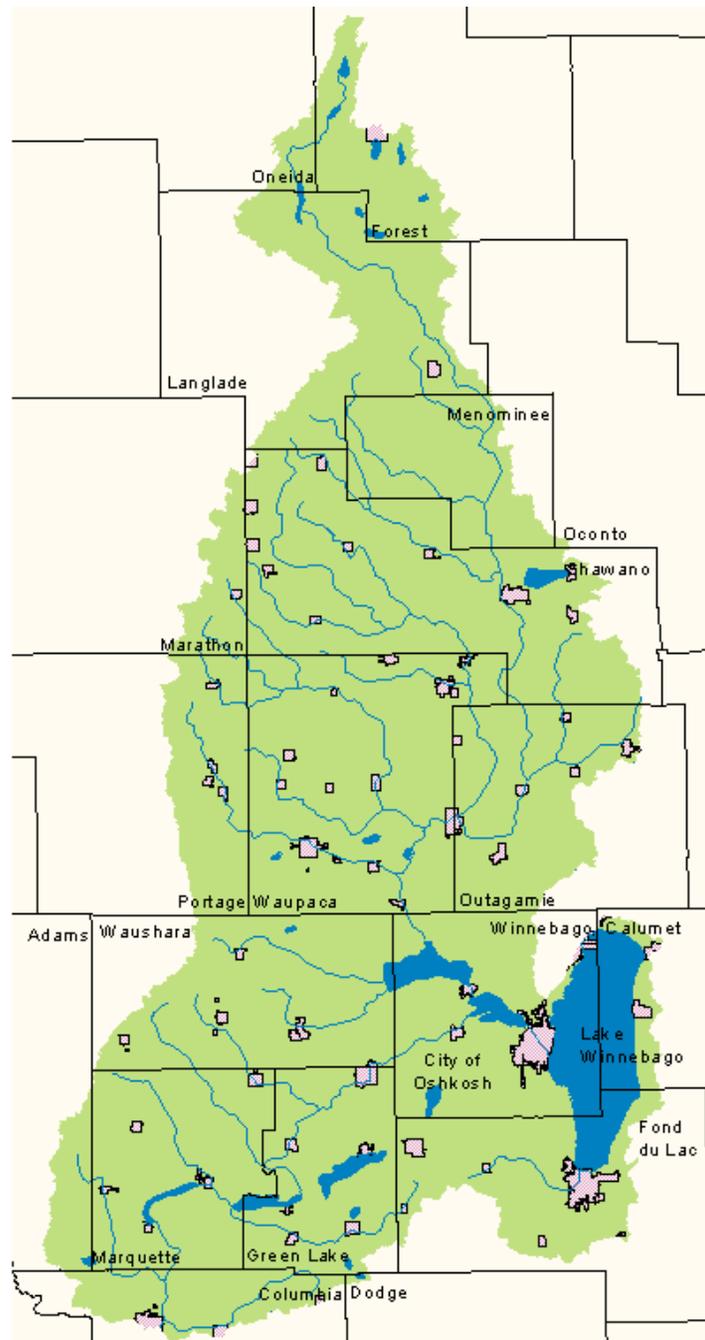

Legend

- Municipal Area
- County Boundaries
- Stream
- Lake
- Source Water Area



10 0 10 20 Miles




Hydrology

As shown in Figure 2, the source water area encompasses all land that drains into Lake Winnebago. This includes the Upper Fox and Wolf River drainage basins. Originating in Forest County, the Wolf River flows south receiving input from the West Branch of the Wolf River, the Shioct River, the Embarras River, the Little Wolf River and the Waupaca River. It then enters Lakes Poygan, Winneconne and Butte des Morts where it merges with the Upper Fox River. The Upper Fox River originates in Green Lake County receiving flow from Neenah Creek, Tagatz Creek, Grand River, Mecan River, White River and Silver Creek, before entering Lake Butte des Morts. The Upper Fox drains Lake Butte des Morts to the east and discharges into Western Lake Winnebago. Land adjacent to Lake Winnebago, which is drained by Van Dyne Creek, Fond du Lac River, Pipe Creek, Johnson Creek, Mud Creek and Mill Creek is also part of the source water area. Lake Winnebago discharges to the Lower Fox River on the northern shore at the cities of Neenah and Menasha.

The western and northern portions of the source water area are characterized by hilly to flat topography, sandy loam soils with moderate and high rates of permeability, cold ground water fed streams of high water quality and a mix of agricultural and natural vegetative land cover types. The eastern and southern portions of the source water area are typified with flat topography, clayey soils with moderate to low permeability, erratic warm water streams of lower water quality and intensive agricultural and urban land coverage. At the City of Oshkosh, the average stream flow of the Upper Fox is over 4,400 cubic feet per second.

Figure 2: Detailed Drainage Pattern of Source Water Area

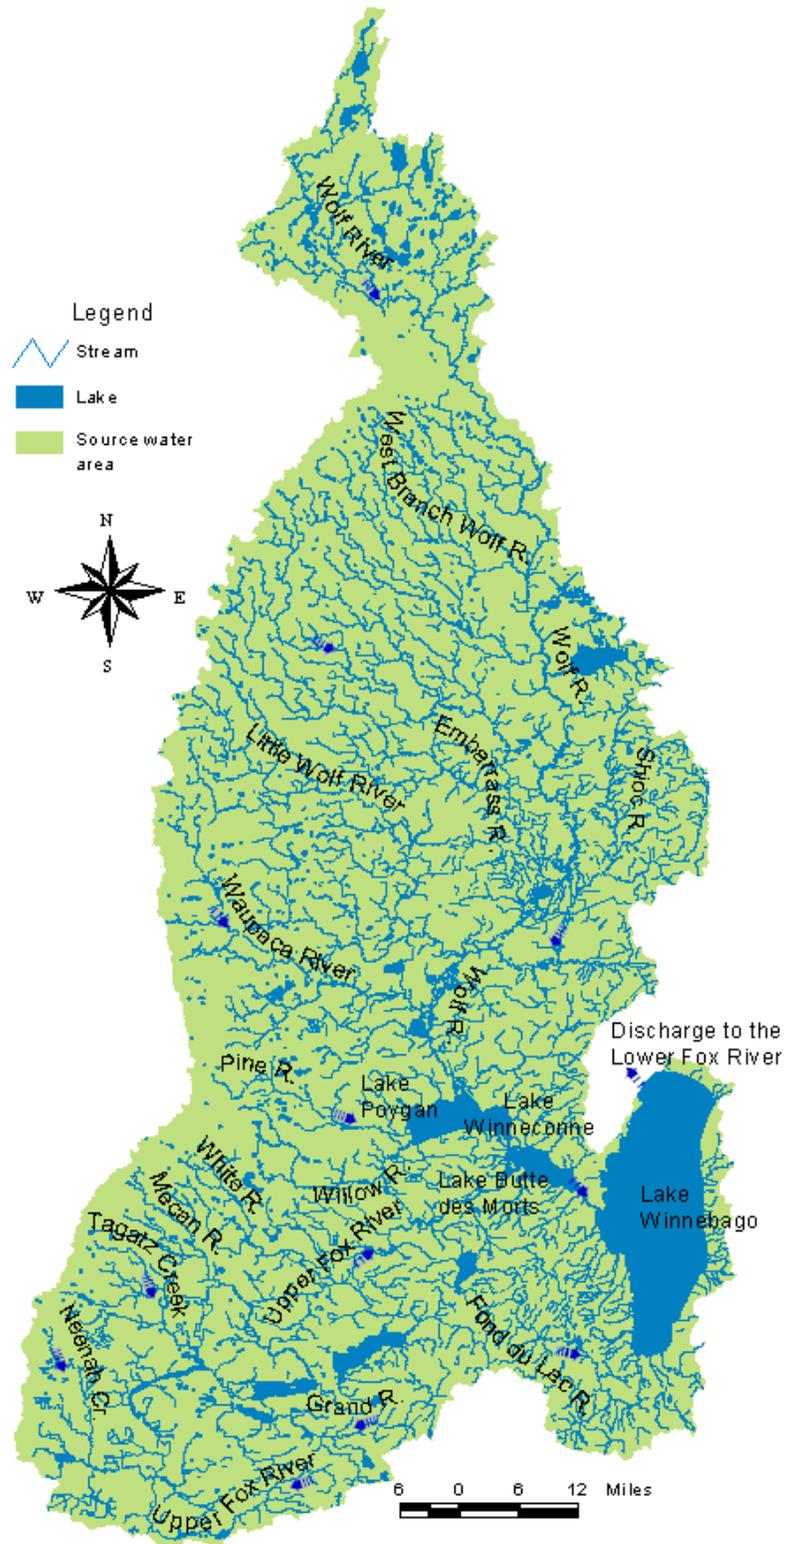

Land Cover


Land cover can play a major role in source water quality. Land cover can affect source water negatively and / or positively. Spatial data in Figure 3 was generated from interpretations of aerial photographs taken from 1971 to 1982.

- *Agricultural*

For this assessment agricultural land cover includes cropland, pasture, orchards and nurseries. Agricultural practices generally cause the land to be more susceptible to erosion and runoff than naturally vegetated land. Due to common practices and activities, agricultural land cover can be a major source of inorganic, treatment byproduct precursors, microbial and synthetic organic contaminants for the source water.

The majority of land coverage in the eastern and southern portions of the source water area is agriculture. Corn and livestock are the predominant types of agricultural activities. The Wisconsin DNR identified nonpoint source pollution from agricultural land as negatively impacting source water in the majority of streams in the southern source water area. Barnyard runoff and stream bank pasturing were also identified as negative impacts on source water. Particular agricultural areas of severe degradation include portions of the source water area located in Fond du Lac, Winnebago, Northern Green Lake, Calumet and Outagamie Counties. These areas contribute the most total suspended solids and phosphorous to Lake Winnebago and have the highest rates of erosion in the source water area.

Figure 3: Land Cover of the Source Water Area

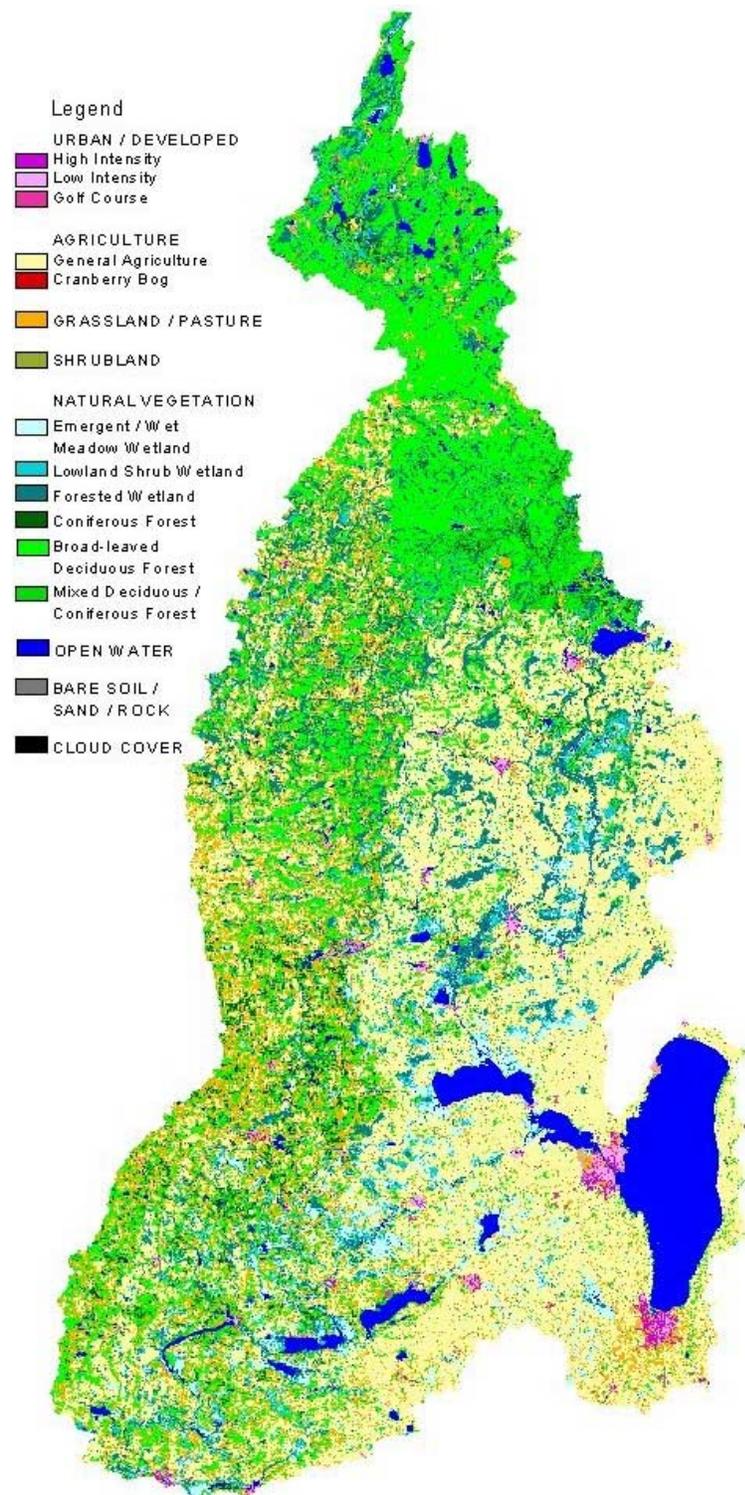

- *Urban*

Urban areas depicted in Figure 3 include residential, industrial and commercial activities. Contaminants associated with residential land cover include synthetic organic, volatile organic, inorganic, precursors of disinfection by-products and microbial contaminants. Due to high concentrations of impermeable surfaces, such as streets, driveways, parking lots, sidewalks and roofs, urban areas have increased potential to create large quantities of runoff during and following precipitation events. Runoff from residential areas transports contaminants associated with this land cover into source water. These contaminants can also enter source water from residential areas through point source discharges and atmospheric deposition.

Urban runoff was identified by the Wisconsin DNR as negatively impacting Lake Winnebago and streams in Winnebago County. The largest urban areas in the source water area are Oshkosh and Fond du Lac, which have concentrated populations, low overall permeability and a wide array of recreational, industrial and commercial activities requiring the storage and use of toxic chemicals. Other urban areas within the source water area include the cities and towns of Berlin, Omro, New London, Seymour, Clintonville, Marion, Shawano, Princeton, Stockbridge, Winneconne, Fremont, Hortonville, Shiocton, Black Creek, Embarrass, Bonduel, Cecil, Rosendale, Oakfield, Redgranite and Lohrville.

- *Natural vegetation*


For this assessment, natural vegetation includes wetlands, woodlands and some unused lands. Generally, natural vegetation has positive impacts on source water. These impacts include increased infiltration of precipitation into the ground, decreased quantity of storm water runoff, removal of contaminants from source water, reduced potential for erosion and less drastic fluctuations of streamflow.

Areas of natural vegetation, such as wetlands and forests are most dominant in the northern portion of the source water area in the counties of Langlade, Forest, Oneida and Menominee. These areas of natural vegetation aid in protecting source water by filtering and removing contaminants, reducing sedimentation of waterbodies and reducing the amount of runoff from precipitation events.

Water quality

Water quality throughout the source water area varies widely. Streams in the northern and western portions of the source water area are groundwater-fed streams with fewer water quality problems. As shown in Figure 4, many streams in this area are ranked as exceptional and outstanding resource waters. Outstanding resource waters are defined as a lake or stream having excellent water quality, high recreational and aesthetic value, high quality fishing and free from point and nonpoint source pollution. Exceptional resource waters are defined as a stream exhibiting the same high quality resource values as outstanding waters but may be impacted by point source or have the potential for future discharge from a small sewered community. Streams in the eastern and southern portions of the source water area have more water quality problems. As shown in Figure 4, multiple streams and lakes in the southern and eastern portions of the source water area are listed on the WDNR impaired waterbodies list. Typical problems in these streams include contaminated sediments, inorganic and synthetic organic compound contamination, channelization, sedimentation and hydrologic modifications. Sources of these problems include stream bank erosion, barnyard runoff, cropland erosion, agricultural and urban nonpoint source pollution. Synthetic organic contamination of groundwater has been detected in Northern Winnebago County.

Figure 4: Water Quality in the Source Water Area

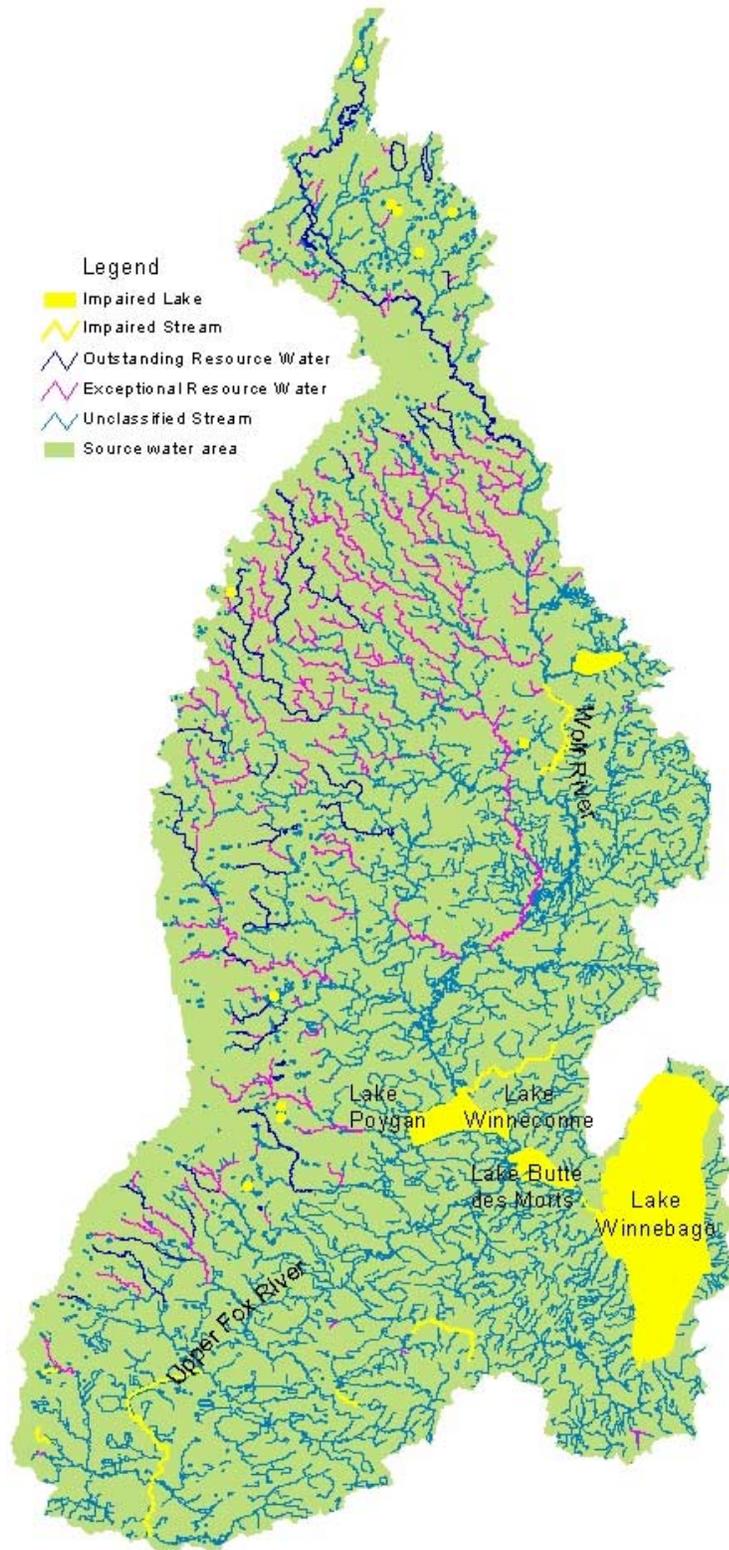

Description of Lake Winnebago

Physical Characteristics

With a surface area of nearly 138,000 acres and a maximum depth of 21 feet, Lake Winnebago is the largest lake in the state. With an average depth of 15.5 feet, the lake has a calculated volume of 696 billion gallons. It has a length of about 28 miles and a width of about 10 miles. Lake Winnebago normally experiences ice over from late December to April. These physical characteristics coupled with suspension of sediments by wind and high pollutant loading associated with land activities throughout the source water area combine to make Lake Winnebago a warm water, highly productive, lake with poor water quality.

Wind

Wind plays a major role in the water quality of Lake Winnebago. Wind frequently suspends sediments in the lake water. Locally, this churns and redistributes contaminants that would normally remain in lake bottom sediments. The extent of lake-wide redistribution and mixing caused by wind is not fully understood.

Water Quality

Existing monitoring data indicates that Oshkosh's source water is highly turbid with poor water quality for microbial, synthetic organic, volatile organic and inorganic parameters. Generally, water quality is highest during late winter. This is due to lower inputs from the source water area and ice cover preventing suspension of sediments. Water quality is lowest during late summer and early fall when wind storms of varying direction suspend sediments, water temperatures rise, and more pollutant loading from the source water area occurs. Day to day fluctuations in water quality occur as a result of wind. Spring runoff from melt water strongly affects seasonal and long-term water quality in Lake Winnebago. It is important to note that source water quality data at the intakes is based almost entirely on periodic monitoring that occurs at the drinking water intakes and few contaminants have been comprehensively monitored in source water at the intakes.

Monitoring of microbial contaminants has revealed high levels of total coliform and frequent detects of fecal coliform in the source water at the public drinking water intake. *Giardia* has been detected twice in the source water at the intake. *Cryptosporidium* has been detected in Lake Winnebago but not at the Oshkosh intakes. Microcystin toxins occasionally reach levels in source water that are above the World Health Organization's standard for drinking water during late summer. Concentrations of treatment by-products in finished water reveal that high levels of dissolved organic carbon, a precursor to treatment by-products exist in the source water.

From 1992 to 2002 four volatile organic contaminants associated with industrial, commercial and residential activities were detected in the source water at the intake. During this same time period, atrazine a synthetic organic contaminant associated with corn cultivation was detected in the source water at the intake. Phosphorous, an inorganic contaminant associated with agricultural and urban runoff, does not have a direct impact on human health, but high lake-wide levels support the summer blue green algal blooms that release microcystin toxins.

Susceptibility Assessment

For the purposes of Wisconsin's source water assessments, susceptibility is defined as the likelihood that a contaminant of concern will enter a public water supply at a level that may result in an adverse human health impact. A susceptibility determination is based on a stepwise synthesis of information regarding the well or surface water intake vulnerability and the source water's sensitivity to a potential source of a contaminant of concern.

Methodology

Detailed guidelines for completing this source water assessment can be found in Wisconsin's Source Water Assessment Program Plan (W-DNR, 1999).

An initial survey was performed on the Oshkosh source water area to assess local impacts to the source water. The initial survey included interviewing intake operators and reviewing existing data. The

preliminary survey revealed the source water to be significantly impacted by the source water area and highly susceptible to contamination.

A second, more detailed assessment was conducted in order to determine which areas and activities within the source water area were negatively impacting the source water quality. This more in-depth study reviewed the impact of particular potential contaminant sources in the source water area, a detailed analysis of historical water monitoring data throughout the source water area and characteristics of Lake Winnebago.

Sensitivity Analysis

Sensitivity is defined as the likelihood that source water will be impacted by contaminants due to the intrinsic physical attributes of the source water area. Sensitivity is determined from the natural setting of the source water and indicates the natural protection afforded the source water. Factors in sensitivity include hydrologic characteristics of the source water area, proximity, direction and quantity of discharge relative to the intake and degree of dilution afforded by distance from shore and depth of intake.

Due to the physical characteristics of Lake Winnebago, all Lake Winnebago surface water intakes are considered to be highly sensitive.


Potential Contaminant Source Inventory

A major component of the susceptibility determination is based on the distribution of potential contaminant sources in the source water area. A high density of potential contaminant sources in the source water area would indicate a higher probability of contaminating source water. Source water from a source water area with a low density of potential contaminant sources would be less likely to become contaminated.

It is important to understand that a potential contaminant source is not necessarily a source of contaminants. It has the potential to become a source of contaminants but if managed properly may not impact the source water.

Data used in the significant potential contaminant source inventory includes area wide, regional and localized information sources. Area-wide locational data are displayed in Figures 6, 7, 8, 9 and 10, as is some regional data. Area-wide data is locational data available for the entire source water area. Regional locational data is not available for the entire source water area but is available for portions of the source water area. Information for the remainder of the potential contaminant sources was inventoried only within source water areas for ground water systems. These areas of localized potential contaminant source inventories are shown on Figure 5. Information concerning the distribution of localized significant potential contaminant sources is not

Figure 5: Localized Potential Contaminant

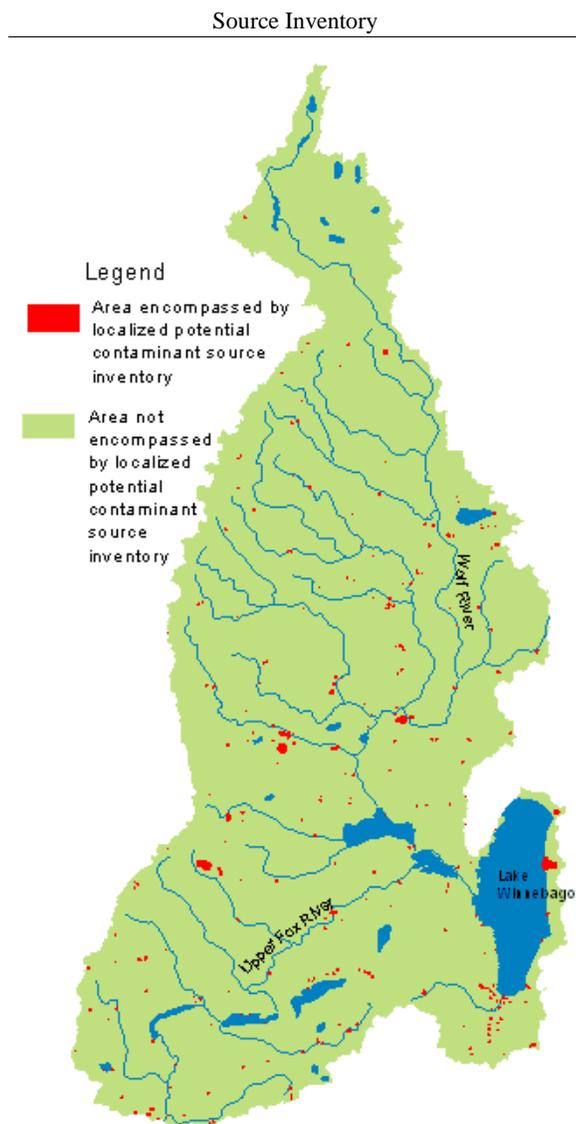

available for land outside of the red areas in Figure 5. Potential contaminant sources inventoried within these areas are shown on Figures 11, 12, 13 and 14.

Animal feeding operations

Animal feeding operations are agricultural operations where animals are kept and raised in confined situations. Animal feeding operations generally congregate animals, feed, manure and production operations on a relatively small area of land. Feed is brought to the animals rather than the animals grazing or otherwise seeking feed in pastures. Animal waste and wastewater can enter water bodies from spills or breaks of waste storage structures (due to accidents or excessive rain), and manure spreading practices. Animal feeding operations have the potential to contribute pollutants such as inorganic, synthetic organic and microbial contaminants as well as hormones and antibiotics to the source water.

Animal feeding operations shown on Figure 6, 7, 8, 9 and 10 include only the larger animal feeding operations (over 1,000 animal units), which are regulated for wastewater discharge. This does not include the more common smaller animal feeding operations. A limited distribution of smaller animal feeding operations in the source water area is depicted in Figure 11. Due to less regulation, smaller animal feeding operations may have an increased potential to contribute increased nonpoint source pollution into source water.

Wastewater Treatment Facilities

Wastewater treatment facilities (WWTFs) include municipal and industrial operations. Municipal facilities can be sources of inorganic, microbial, synthetic organic and volatile organic contaminants as well as hormones, pharmaceuticals and other organic contaminants that have been linked to developmental and reproductive defects in animals. Following treatment, effluent is frequently discharged through an outfall directly into surface water. Typical treated and disinfected sewage contains low concentrations of contaminants. During or following a storm event, the municipal WWTF may be inundated with more raw sewage than it can process. In the event of this a bypass or sanitary sewer overflow occurs. This allows untreated sewage to enter directly into surface water. A typical bypass will contain a high concentration of contaminants associated with urban runoff and WWTFs. Contaminants associated with industrial WWTFs are dependent upon the specific industry but may include microbial, volatile organic, inorganic and synthetic organic contaminants.

As shown in Figures 6, 7, 8 and 9, there are numerous WWTFs that discharge to surface water and groundwater distributed throughout the source water area. According to the Wisconsin DNR's list of impaired waterbodies, Lakes Winnebago and Butte des Morts are being negatively impacted by municipal treatment systems as are multiple streams in the source water area. Industrial and municipal WWTFs were also identified as negative impacts on various streams in the source water area.

Landfills

Prior to the mid 1970s landfills were not regulated and were common sources of contaminants. Some of these are depicted in this assessment as waste disposal sites. Licensed landfills are now strictly regulated and monitored. Closed and active landfills can be sources for inorganic, synthetic organic and volatile organic contaminants in source water.

As shown in Figures 6, 7, 8, 9 and 10, there are several licensed landfills and waste disposal sites in the source water area. Two closed landfills are Superfund sites and eight landfills in the source water area are included on the WDNR's Bureau of Remediation and Redevelopment Tracking System, which is discussed below.

Wisconsin DNR's Bureau of Remediation and Redevelopment Tracking System

The WDNR Remediation and Redevelopment Program keeps track of sites where chemical contamination of soil, surface water and/or groundwater has occurred. The Bureau of Remediation and Redevelopment Tracking System (BRRTS) is the Department's database for tracking the status of investigation and cleanup activities at these sites. There are several types of sites that are tracked by BRRTS, including leaking underground storage tank sites, Environmental Repair Program sites, spill sites and Superfund sites. For information on specific contamination sites in Wisconsin please visit BRRTS at, <http://www.dnr.state.wi.us/org/aw/rr/brrts/index.htm> on the World Wide Web.

- Leaking Underground Storage Tank sites

A Leaking Underground Storage Tank (LUST) site is defined as a leaking underground storage tank that has contaminated soil and/or groundwater with petroleum, a volatile organic contaminant.

As shown in Figure 7, there are many LUSTs near the drinking water intake. As shown in Figures 6, 8, 9 and 10, other high concentrations of LUSTs in the source water area are generally found in urban areas.

- Environmental Repair Program sites

Environmental Repair Program (ERP) sites are sites other than LUSTs that have contaminated soil and/or groundwater. Often, these are old historic contaminant releases to the environment. They frequently include abandoned landfills, coal gasification and metal stripping sites, among other contaminant sources. Contaminants associated with ERP sites are site specific, but they frequently include volatile organic, synthetic organic and inorganic contaminants.

As shown in Figure 7, there are many ERP sites near the drinking water intake. As shown in Figures 6, 8, 9 and 10, other high concentrations of ERP sites in the source water area are generally found in urban areas.

- Spill sites

Spills are defined as a discharge of hazardous substances that may adversely impact, or threaten to adversely impact public health, welfare or the environment. Volatile organic contaminants are frequently associated with spills.

It is important to note that the number of unreported spills is unknown, but is probably well beyond those spills that have been reported. As of 2001, there have been 214 spills reported in the municipality of Oshkosh, 185 of which have not been cleaned up. Of the total 214 reported spills, twenty spills entered surface water directly and twelve entered storm sewers. Storm sewers can act as conduits for contaminants to reach source water.

- Superfund sites

Superfund sites are highly contaminated areas that have been set aside for cleanup by the USEPA. For more information on the Superfund program and individual sites please see <http://www.epa.gov/superfund/> on the World Wide Web.

As shown in Figure 6, there are 2 active Superfund sites in the source water area. They are the Schmalz Dump site located in the town of Harrison, Calumet County and the Ripon City Landfill site located in western Fond du Lac County.

The Schmalz Dump site, covers $\frac{3}{4}$ -acre near the northern shore of Lake Winnebago. Unauthorized dumping of ash and demolition debris with synthetic organic contaminants occurred at the site from 1968 to 1979. Water from the site flows 500 feet before discharging into northern Lake Winnebago. Groundwater near the site is contaminated by inorganics. Soil, lake sediments and surface water near the site were contaminated with inorganic and synthetic organic contaminants.

The Ripon City Landfill site is an area historically used by the city of Ripon and an appliance manufacturer for waste disposal. Synthetic organic and volatile organic contamination of groundwater has been detected beneath this site.

Hazardous Waste Generators

Hazardous waste generators are defined as facilities, which handle materials classified as hazardous waste. Hazardous waste is defined as any substance that is toxic to humans. Contaminants associated with hazardous waste generators are site specific. Hazardous waste generators include a wide array of facilities ranging from hospitals and schools to manufacturing and industrial operations.

As shown in Figure 6, there are several large quantity hazardous waste generators located in the source water area. They are concentrated in the cities of Fond du Lac and Oshkosh. As shown in Figure 7, there are fifteen large quantity hazardous waste generators in the municipal area of Oshkosh. This does not

depict the more numerous smaller quantity hazardous waste generators, which are found throughout the source water area.

Pipelines

Pipelines have the potential to be major sources of contaminants to source water. Contaminants associated with pipelines are specific to individual pipelines, but generally contain volatile organic contaminants. Contaminants from pipelines may enter source water through small leaks or accidental spills.

An underground gasoline and distillate pipeline transects the southwestern portion of the source water area. This pipeline crosses multiple streams in the source water area.

Construction Sites

Due to uncovered material, handling of toxic chemicals and exposed ground, construction sites can impact the source water more intensely than urban land coverage.

There has recently been rapid urban and residential development in close proximity to the drinking water intake. From 1993 to 1998 the population of Oshkosh grew by 10 percent. From 1990 to 2000 Winnebago County grew by 11.7 percent. This includes renovation projects in downtown Oshkosh and suburban developments. One area of particularly concentrated development is the town of Algoma directly west of Oshkosh. Other areas of heavy development in the source water area include the cities of Neenah and Menasha and lakefront property on Lake Winnebago.

Wildlife

Natural levels of wildlife generally do not have a significant impact on water quality. However, concentrated animal populations can have a major impact on water quality. They are known to contaminate water with microbial and inorganic contaminants. These concentrations are frequently related to human activities, such as landfills, protected waterways and recreational areas where feeding of wildlife occurs.

There is a high concentration of sea gulls nesting on the rock walls surrounding the Oshkosh Waterworks open-air pretreatment settling basin in Millers Bay, shown in Figure 7. These sea gulls produce large quantities of waste in the pretreatment settling basin. Due to lack of dilution before entering the treatment facilities, this could be major source of microbial and inorganic contaminants in the source water.

Boating-related Activities

Boating-related activities are potential sources of volatile organic, inorganic and microbial contaminants to the source water. Contaminants can enter directly into the source water through spills or indirectly through runoff from marinas and shipyards where many cleaning agents, paints, petroleum products and other chemicals are commonly stored and used.

Recreational boating is very popular throughout Lake Winnebago and the source water area. As shown in Figure 7, there are 7 public boat launches and 10 marinas along with a high concentration of shipyards, piers, boat storage facilities and private docks located near the intake.

Railroads and Related Activities

Railroads and switchyards can be sources of contaminants via spills, which are transported as cargo on trains or by contaminants used in the day-to-day operation of trains. Contaminants associated with spills of cargo vary depending on individual trains and regions, but in 2000 there was an estimated 4.4 million tons of hazardous material transported by rail statewide. Contaminants associated with the day-to-day operation and maintenance of railroads and switchyards include synthetic organic, volatile organic and inorganic contaminants.

As shown in Figure 6 and 7, railroads parallel and cross multiple streams throughout the source water area.

Figure 6: Area wide Potential Contaminant Source Inventory

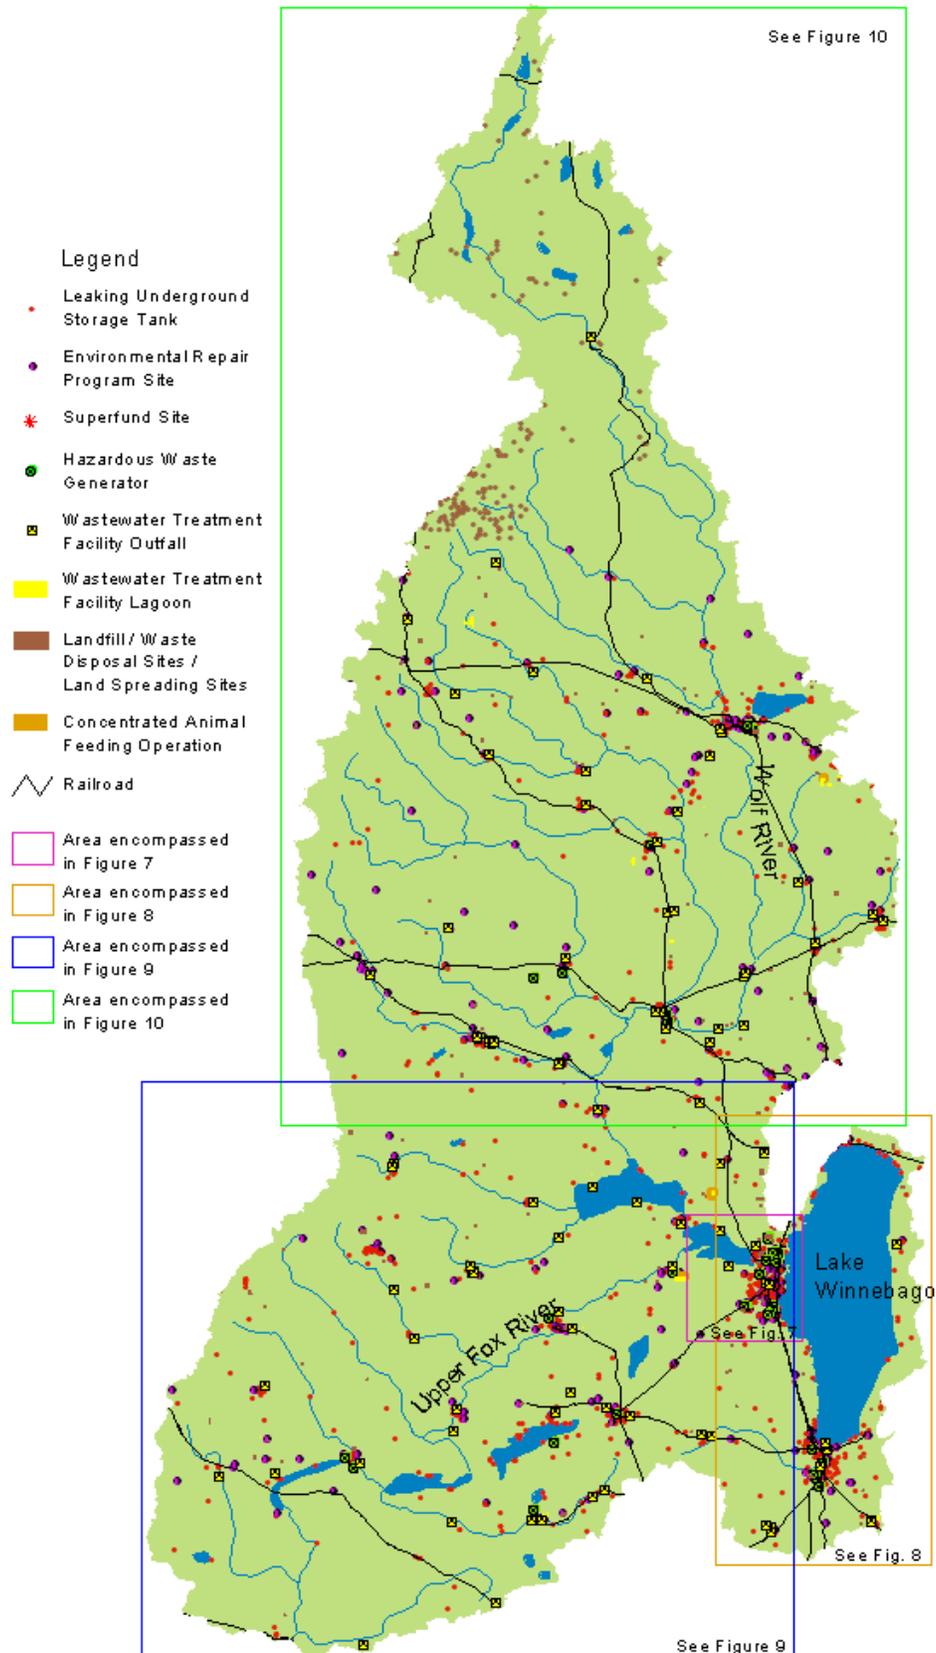


Figure 7: Oshkosh Area Potential Contaminant Source Inventory

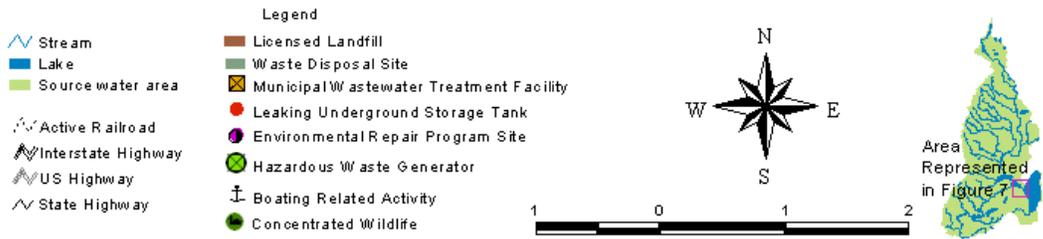


Figure 8: Lake Winnebago Area Potential Contaminant Source Inventory

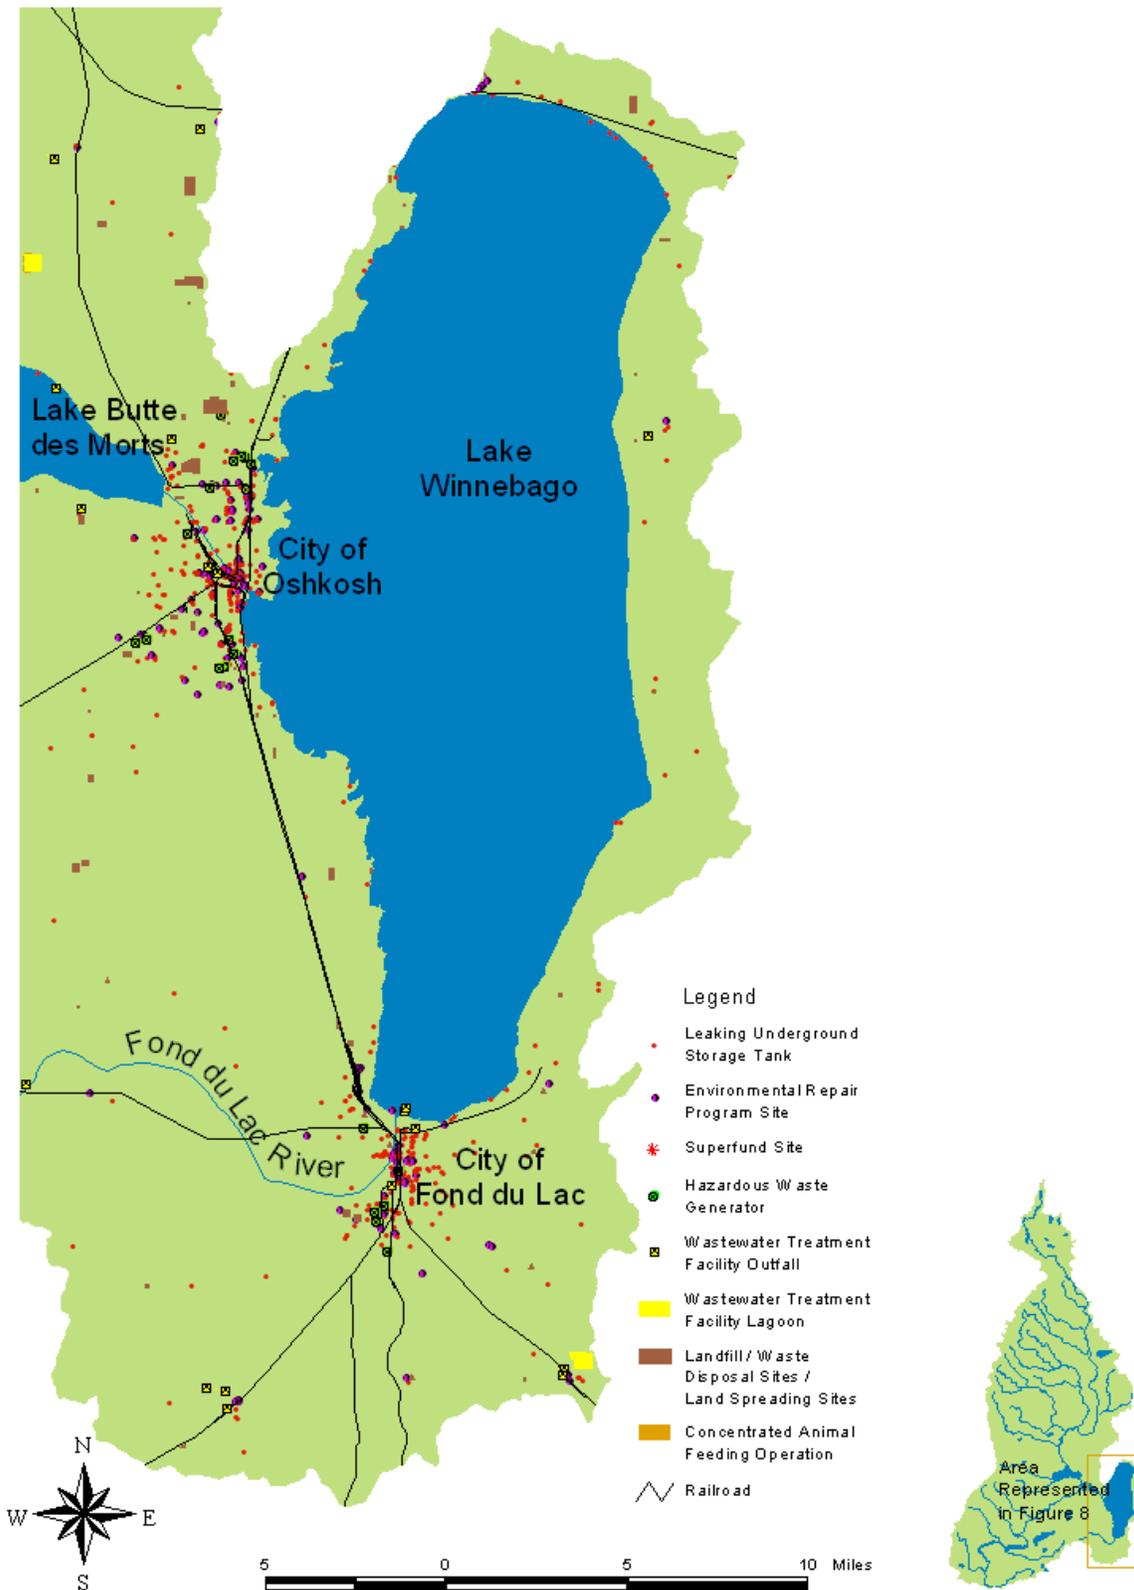


Figure 9: Upper Fox River Area Potential Contaminant Source Inventory


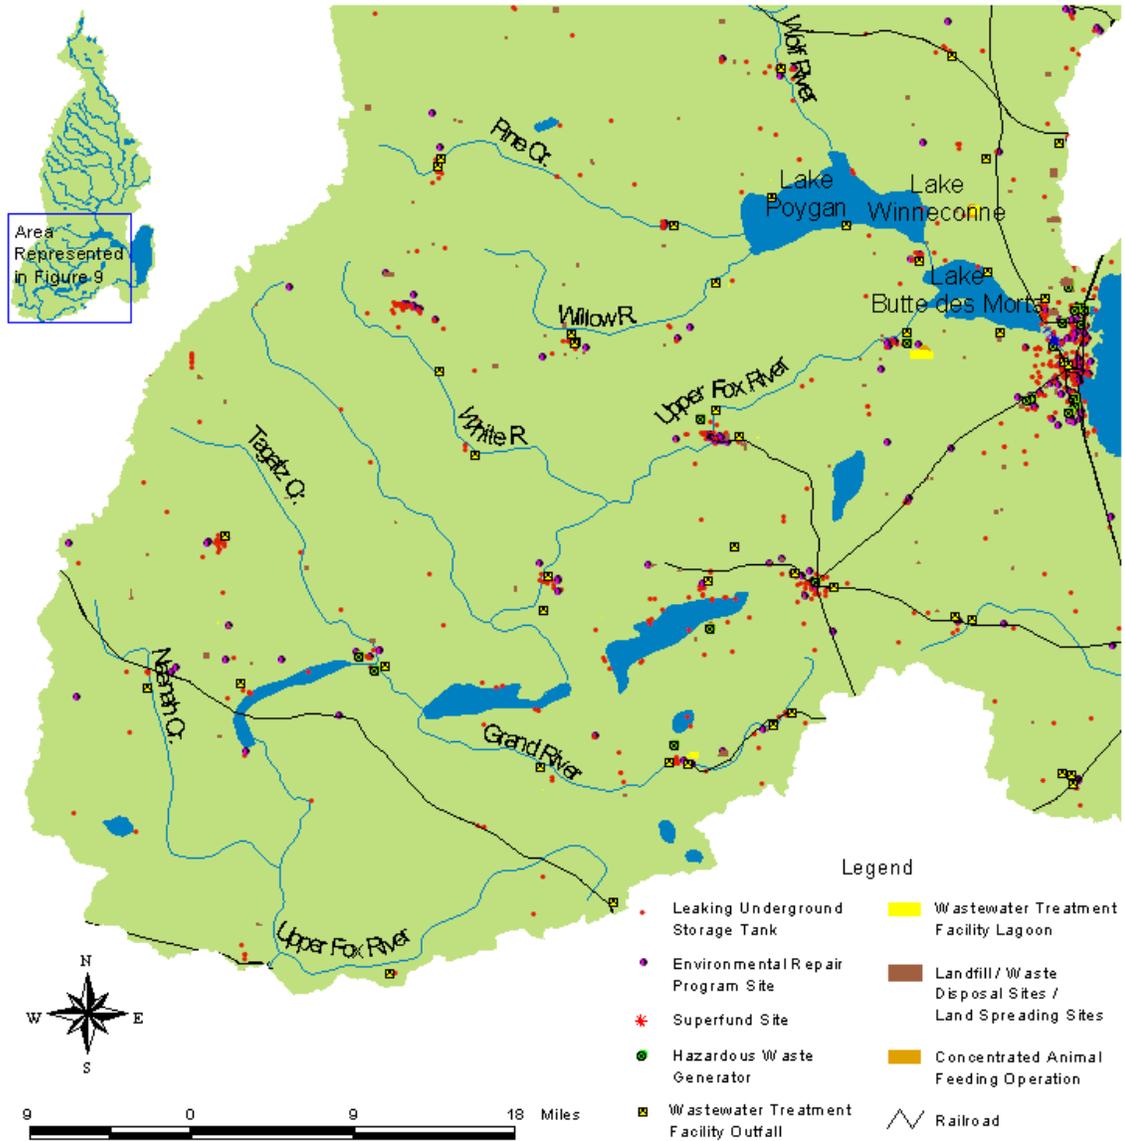



Figure 10: Wolf River Area Potential Contaminant Source Inventory

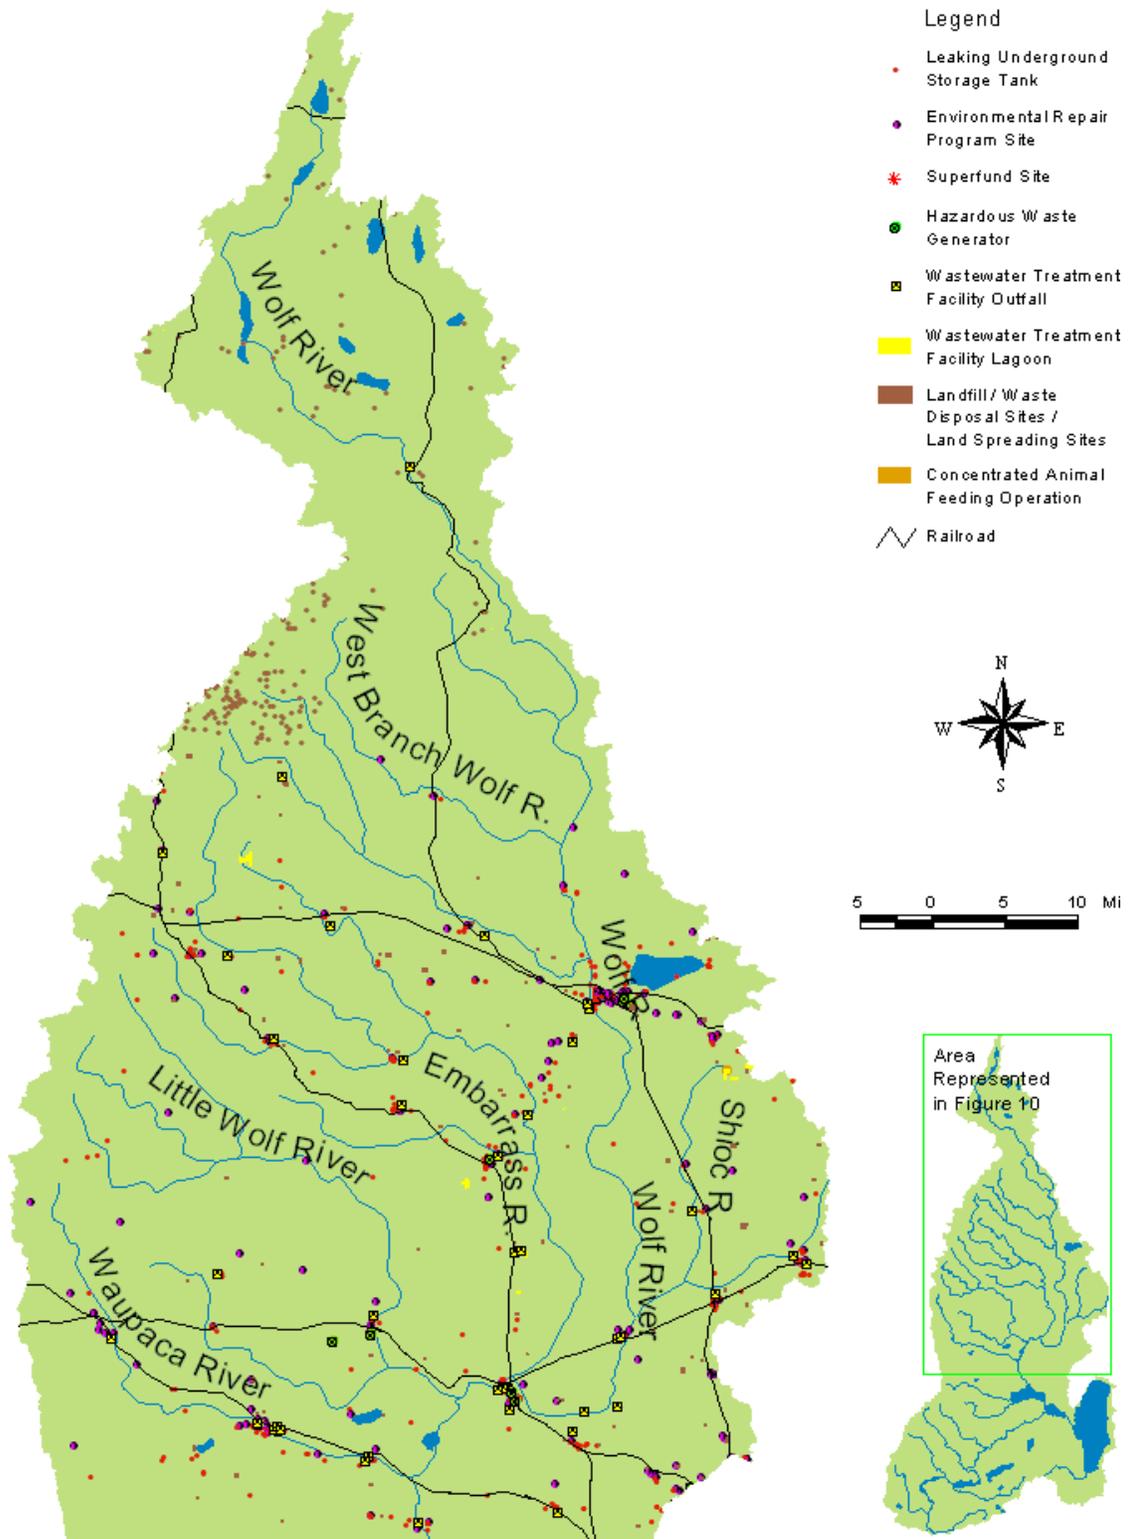

Localized Agricultural and Bulk Storage Potential Contaminant Sources

Localized agricultural and bulk storage potential contaminant sources are shown in Figure 11. Agricultural potential contaminant sources include active farming operations, animal feedlots, agricultural irrigation and lined and unlined manure storage facilities. These activities are potential sources of synthetic organic, inorganic and microbial contaminants. Bulk storage potential contaminant sources include feed mills, agricultural co-ops, 500 gallon and larger petroleum and chemical storage sites and road salt storage sites. Contaminants associated with storage facilities are largely site-specific, but generally they are potential sources of inorganic, synthetic organic and volatile organic contaminants.


Figure 11: Agricultural and Bulk Storage Potential Contaminant Sources

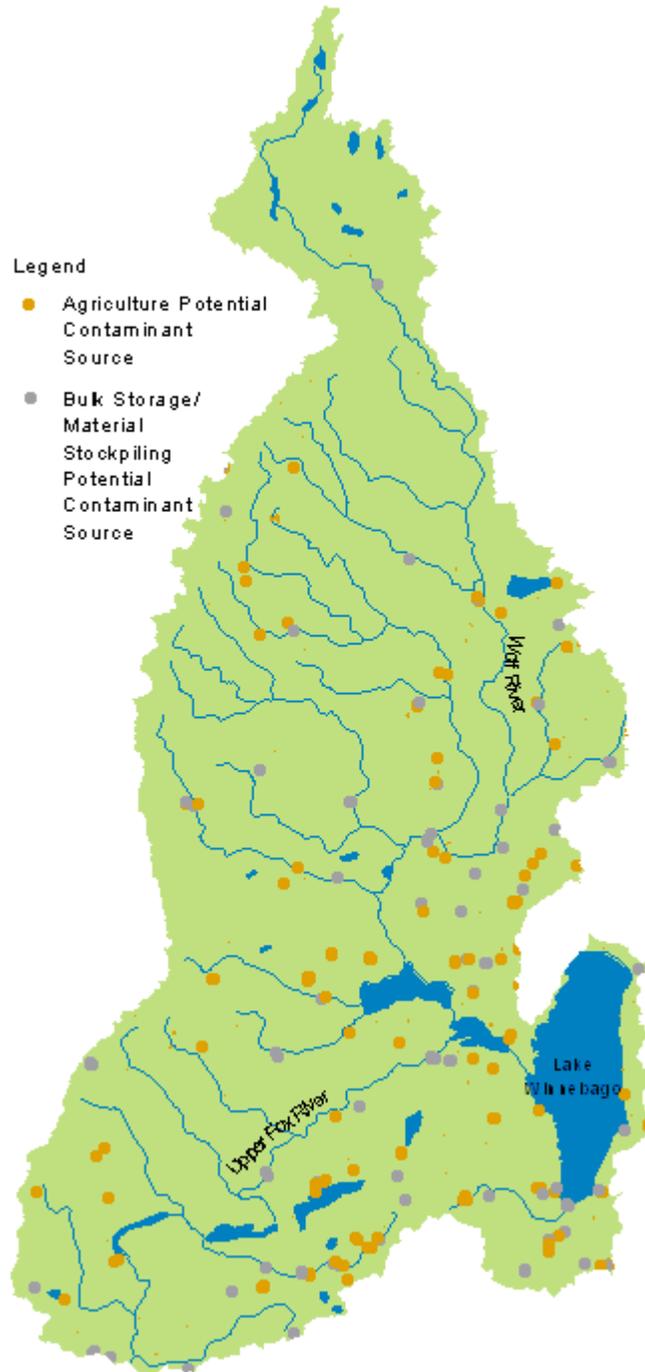

Localized Commercial Potential Contaminant Sources

Localized commercial potential contaminant sources are shown in Figure 12. Commercial potential contaminant sources include airports, auto body shops, boat yards, car washes and Laundromats in unsewered areas, cemeteries, dry cleaners, gas service stations, machine/metal working shops, motor vehicle repair shops, paint shops, photo processing facilities, jewelry and metal plating facilities, printing facilities, rail yards, rail road tracks, scrap/junk yards and seed production plants. These activities are frequently associated with inorganic and volatile organic contaminants.


Figure 12: Commercial Potential Contaminant Sources

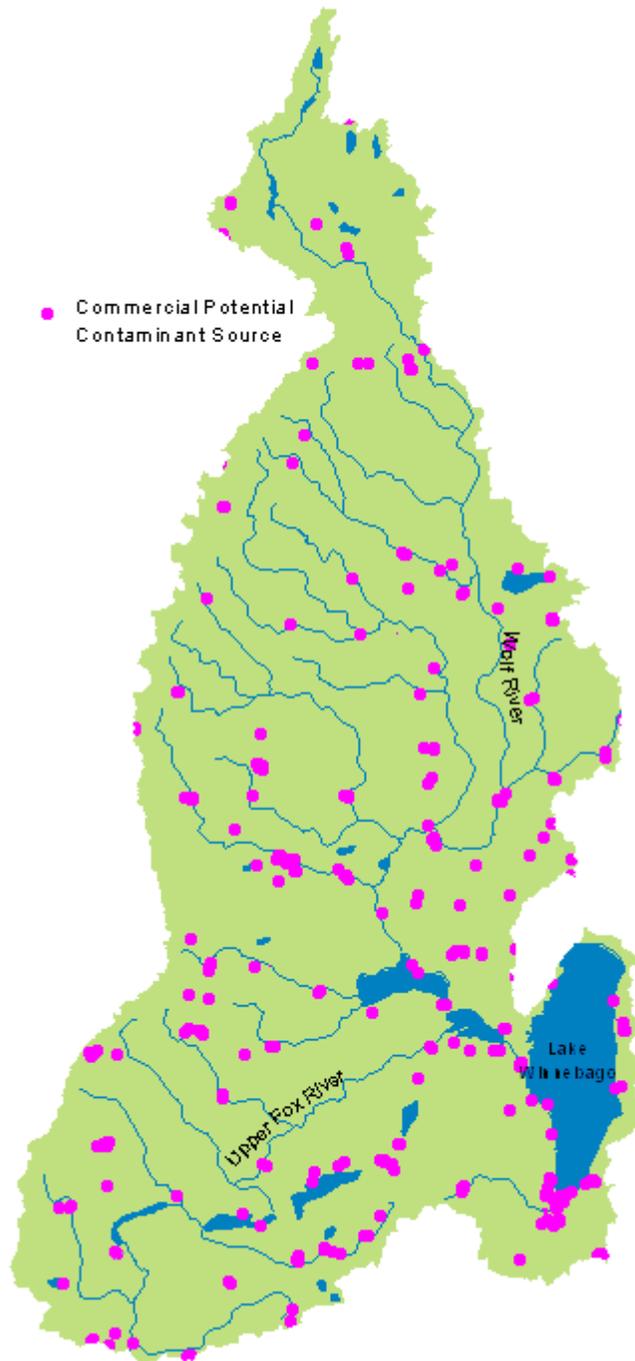

Localized General and Industrial Potential Contaminant Sources

Localized general and industrial potential contaminant sources are shown in Figure 13. General activities include above ground and below ground storage tanks, municipal and non-municipal sewer lines, sewage holding tanks, septic tanks, sumps, drainfields, mounds and dry wells. These activities are potential sources for synthetic organic, volatile organic, inorganic and microbial contaminants. Industrial potential contaminant sources include asphalt plants, industrial chemical production facilities, electronic product manufacturers, electroplating / metal finishing facilities, furniture or wood manufacturing / refinishing / stripping facilities, foundries / smelting plants, mining operations / mine waste sites, paper mills, petroleum and chemical pipelines, plastics manufacturer / molding facilities, wood preserving facilities. These activities are potential sources of volatile organic, synthetic organic and inorganic contaminants.


Figure 13: Industrial and General Potential Contaminant Sources

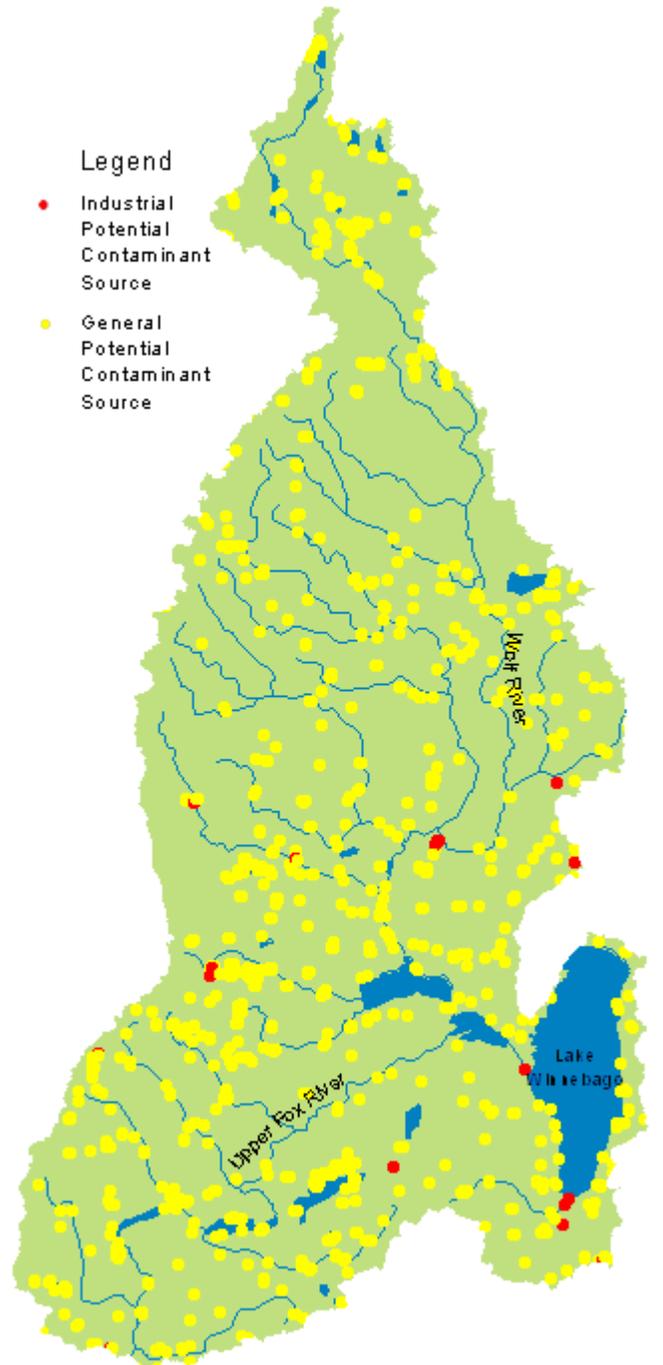

Localized Waste Management and Miscellaneous Potential Contaminant Sources

Localized waste management and miscellaneous potential contaminant sources are shown in Figure 14. Waste management potential contaminant sources include municipal incinerators, injection wells, sludge spreading sites, solid waste transfer stations and wastewater lagoons. These activities are potential sources of inorganic, synthetic organic, microbial and volatile organic contaminants. Miscellaneous potential sources include fire training facilities, golf courses, gasification plants, laboratories and military installations. These sources are associated with microbial, synthetic organic and volatile organic contaminants.

Figure 14: Miscellaneous and Waste Management Potential Contaminant Sources

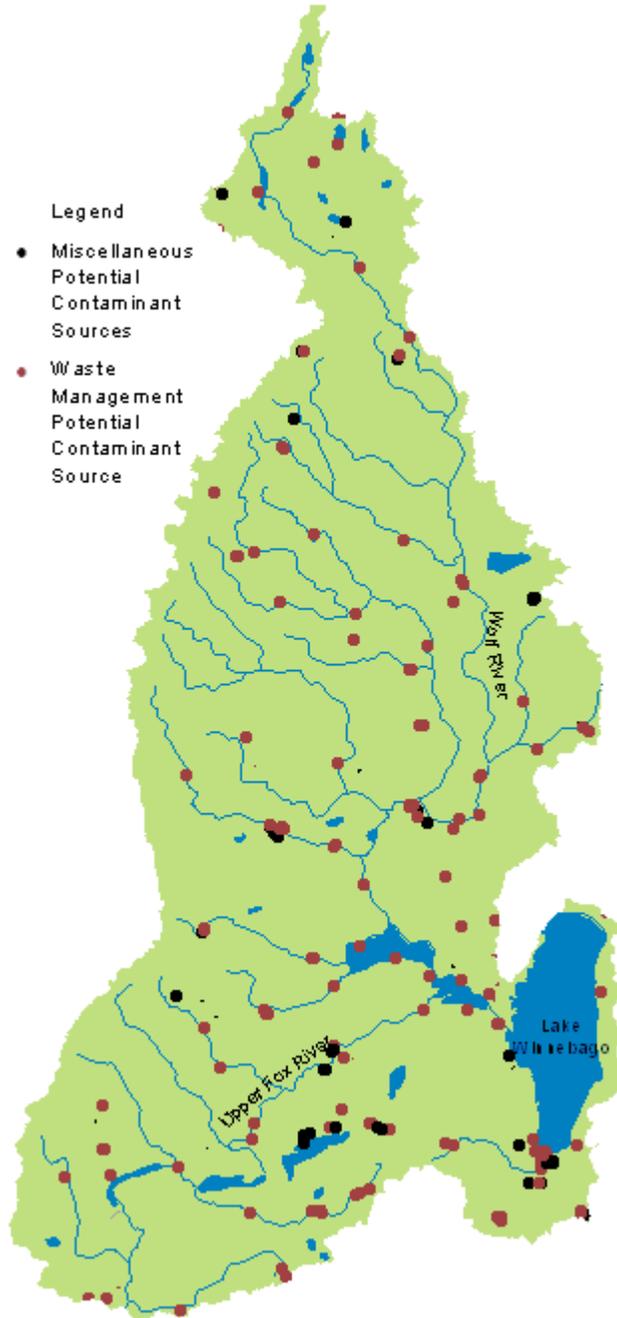

Description of Oshkosh Water Treatment System

Oshkosh Waterworks has reliably provided high quality drinking water to its customers. The average water demand is 7.5 million gallons per day (mgd), but water usage will vary from 10 mgd in summer to 5 mgd in winter.

The current water treatment facility went on line in December of 1999 and has a present capacity of 16 mgd. During normal conditions source water is drawn from Western Lake Winnebago via 1 surface water intake into a large pre-treatment basin. During abnormal circumstances (repairs, rebuilding, etc.) two surface water intakes can be used to draw water directly into the treatment facility, bypassing the pre-treatment basin. Water remains in the pre-treatment basin for approximately four days, during which time it is treated with citric acid and copper sulfate to kill algae and stabilize the water. Water then enters the treatment facility. Contaminants are then removed by flocculation and sedimentation, filtration through dual media filters, ozonation, passage through granular activated carbon filters and chlorine disinfection. Future plans include building a new intake which, as proposed will be a thousand feet farther from shore than the current intake.

Susceptibility Determination

This assessment found Oshkosh's source water to have a relatively high susceptibility to contamination. The physical characteristics of Lake Winnebago and the high concentrations of urbanized and agricultural land in the eastern and southern portions of the source water area make Oshkosh's source water particularly susceptible to microbial, volatile organic, synthetic organic and inorganic contaminants, along with precursors of treatment byproducts.

Recommendations

Source water protection should begin with the formation of a source water protection team composed of delegates from private parties and local, regional, state and federal organizations. This group is needed to plan and implement best management practices in the source water area to prevent source water contamination. Initial source water protection efforts of this team should focus on managing the following,

- Storm water runoff from urban areas near Lake Winnebago
- Storm water runoff from agricultural activities in the eastern and southern portions of the source water area
- Waterfront residential developments
- Landfills and industrial activities near Lake Winnebago
- Boating related activities near the city of Oshkosh
- Birds nesting in the Oshkosh Waterworks pretreatment basin

As mentioned previously a comprehensive source water protection plan is beyond the scope of this assessment. The source water protection team may consider using resources provided by the USEPA at <http://www.epa.gov/safewater/protect/sources.html> on the World Wide Web for overall source water protection planning. This website offers general source water information, financial assistance contacts, source water protection case studies, contaminant source inventories and contingency planning among other subjects. For specific information concerning best management practices and dealing with potential contaminant sources please visit <http://www.epa.gov/ogwdw/protect/swpbull.html> on the World Wide Web.

Selected References

- Agency for Toxic Substances and Disease Registry, ToxFaqs: Hazardous Substance Fact Sheet World Wide Web site, <http://www.atsdr.cdc.gov/toxfaq.html>, accessed 1/2/02.
- Baumgart, P., 2000, Simulated TSS and Phosphorous Loads to Green Bay, Wisconsin
- Cooke, D.G.; Kennedy, R.H., 2001, Understanding Reservoir Water Quality Processes: Implications for Managing Drinking Water Supplies.
- Dissmeyer, G.E., 2000, "Drinking Water from Forests and Grasslands", U.S. Department of Agriculture-Forest Service.
- Karner, D., 1998, Microcystin Algal Toxins from Raw and Finished Waters Collected from Water Treatment Facilities on Rainbow Lake and Lake Winnebago, Wisconsin, Wisconsin State Laboratory of Hygiene.
- Oshkosh Waterworks, 2001, Interviews with water treatment plant employees.
- Sea Grant-University of Wisconsin, Wisconsin Coastal Fact Sheet: Population 1990 to 2000, available on the World Wide Web at <http://coastal.liv.wisc.edu/wipop2000.htm> visited on 2/25/02
- U.S. Environmental Protection Agency (USEPA), STORET Legacy Data Center, <http://www.epa.gov/storpubl/legacy/query.htm>, accessed 1/2/02.
- USEPA, Superfund sites, <http://www.epa.gov/superfund/sites/index.htm>, accessed 1/2/02.
- U.S. Geological Survey (USGS), Surface Water Data for the Nation World Wide Web site, <http://water.usgs.gov/nwis/annual>, accessed 1/2/02.
- USGS, 1992, Ground Water Atlas of the United States: Segment 9.
- Wisconsin Department of Natural Resources (WDNR), Public Water Supply System World Wide Web site, [http://prodmtex00.dnr.state.wi.us/pls/inter1/pws2\\$.startup](http://prodmtex00.dnr.state.wi.us/pls/inter1/pws2$.startup), accessed 12/27/01.
- WDNR, Bureau for Remediation and Redevelopment Tracking System, [http://prodmtex00.dnr.state.wi.us/pls/inter1/brrts2\\$.startup](http://prodmtex00.dnr.state.wi.us/pls/inter1/brrts2$.startup), accessed 12/27/01.
- WDNR, 2001, List of 303(d) Waterbodies.
- WDNR, 2001, Sewer Overflows in Wisconsin- A Report to the National Resources Board.
- WDNR, 2001, State of the Upper Fox River Basin Report- Public Review Draft.
- WDNR, 2001, State of the Wolf Basin Report.
- WDNR, 2001, Sewer Overflows in Wisconsin- A Report to the Natural Resources Board.
- WDNR, 2000, Upper Fox River Water Quality Management Plan- Draft.
- WDNR, 1999, Sanitary Survey-Oshkosh Waterworks.
- WDNR, 1996, Wolf River Basin Water Quality Management Plan.
- WDNR, 1989, Winnebago Comprehensive Management Plan.
- Wisconsin Division of Public Health, 1998, Lake Winnebago Sampling Project, Wisconsin Department of Health and Family Services.