

NH-ALSF TRACT 22-16  
Mud Creek Pine & Oak

Vilas County

Town 40 North, Range 7 East

Section 22 – E1/2SE

Section 23 – NE1/4; E1/2NW; SW1/4; W1/2SE

Section 26 – N1/2NW

Section 27 – E1/2NE

15% of the total sale bid value will be required as performance bond.

The cutting area is approximately 144 acres.

The contract period is 3 years.

All trees that will yield one or more 100-inch sticks to the minimum top diameter chosen by the bidder will be cut and utilized.

---

ESTIMATED VOLUME (TONS)  
MINIMUM TOP DIAMETER

<u>SPECIES</u>	<u>4"</u>	<u>Whole Tree</u>	<u>Advertised Price</u> <u>Per Unit</u>
White Pine <sup>1</sup>	1255		\$ 18.20
Red Pine <sup>2</sup>	975		\$ 21.90
Aspen	620		\$ 12.10
Red Oak <sup>3</sup>	575		\$ 14.10
Mixed Hardwood <sup>4</sup>	345		\$ 12.80
<b>Total Minimum Bid Value</b>			<b>\$ 64,219.00</b>

---

<sup>1</sup>Volume includes 74% white pine, 16% balsam fir and 10% jack pine. It also includes 24 MBF of potential white pine logs (Wt. conv. 2.107 tons/cord).

<sup>2</sup>Volume includes 84 MBF of potential red pine logs.

<sup>3</sup>Volume includes 42 MBF of potential red oak logs.


<sup>4</sup>Volume includes 74% white birch, 22% red maple and 4% hard maple. It also includes 4 MBF of birch log material (Wt. conv. 2.379 tons/cord).

The total sale volume equates to approximately 26.2 tons/acre or 11.5cords/acre.

Special Conditions:

1. Harvesting within filter strips will only be allowed during frozen ground conditions to prevent rutting. All other low ground areas to be operated in during dry or frozen ground conditions. Do not cut within 15 feet of any ephemeral pond. Cutting must be concurrent for all species to be harvested.
2. Biomass harvesting is not allowed. Do not cut, knock down, or utilize dead trees unless the tree poses a safety issue during harvesting operations.
3. No tops or slash allowed across any red line or within any wetland. All slash must be lopped and scattered within 2 feet of the ground and pulled back into the sale area at least 10 feet away from the snowmobile trails.
4. Snowmobile trail must be kept free of debris, snow covered in winter, and left in good condition for vehicle traffic at all times. All trails must be repaired to pre-harvest conditions before the start of each snow season. All landings and any new woods roads must be approved prior to sale start up.
5. All timber sale activity will only be allowed from the Tuesday after Labor Day - April 15, in Zone A. Hours of equipment operation are from 6 a.m. to 9 p.m. within Zone A. All pine products cut between May 1 and September 1 must be removed from the sale area within three weeks from time of cutting. Pine products cut during the remainder of the year must be removed prior to May 1 of each year.
6. If the contract is to be worked on during multiple time periods a mid-contract "pull-off" inspection meeting will be required. One-week notice shall be given by the contractor prior to moving equipment off-site. During the "pull-off" inspection, provisions needing attention will be documented. The contractor at that time can decide to remedy them before pulling equipment off or rectify them when moving back onto the site. If the latter is chosen, documented items shall be addressed before harvesting can continue.

**WISCONSIN  
DEPARTMENT OF NATURAL RESOURCES  
TRACT 22-16 MUD CREEK PINE & OAK  
T40N R7E SECTIONS 22, 23, 26 & 27  
HARVEST ACRES - 144**

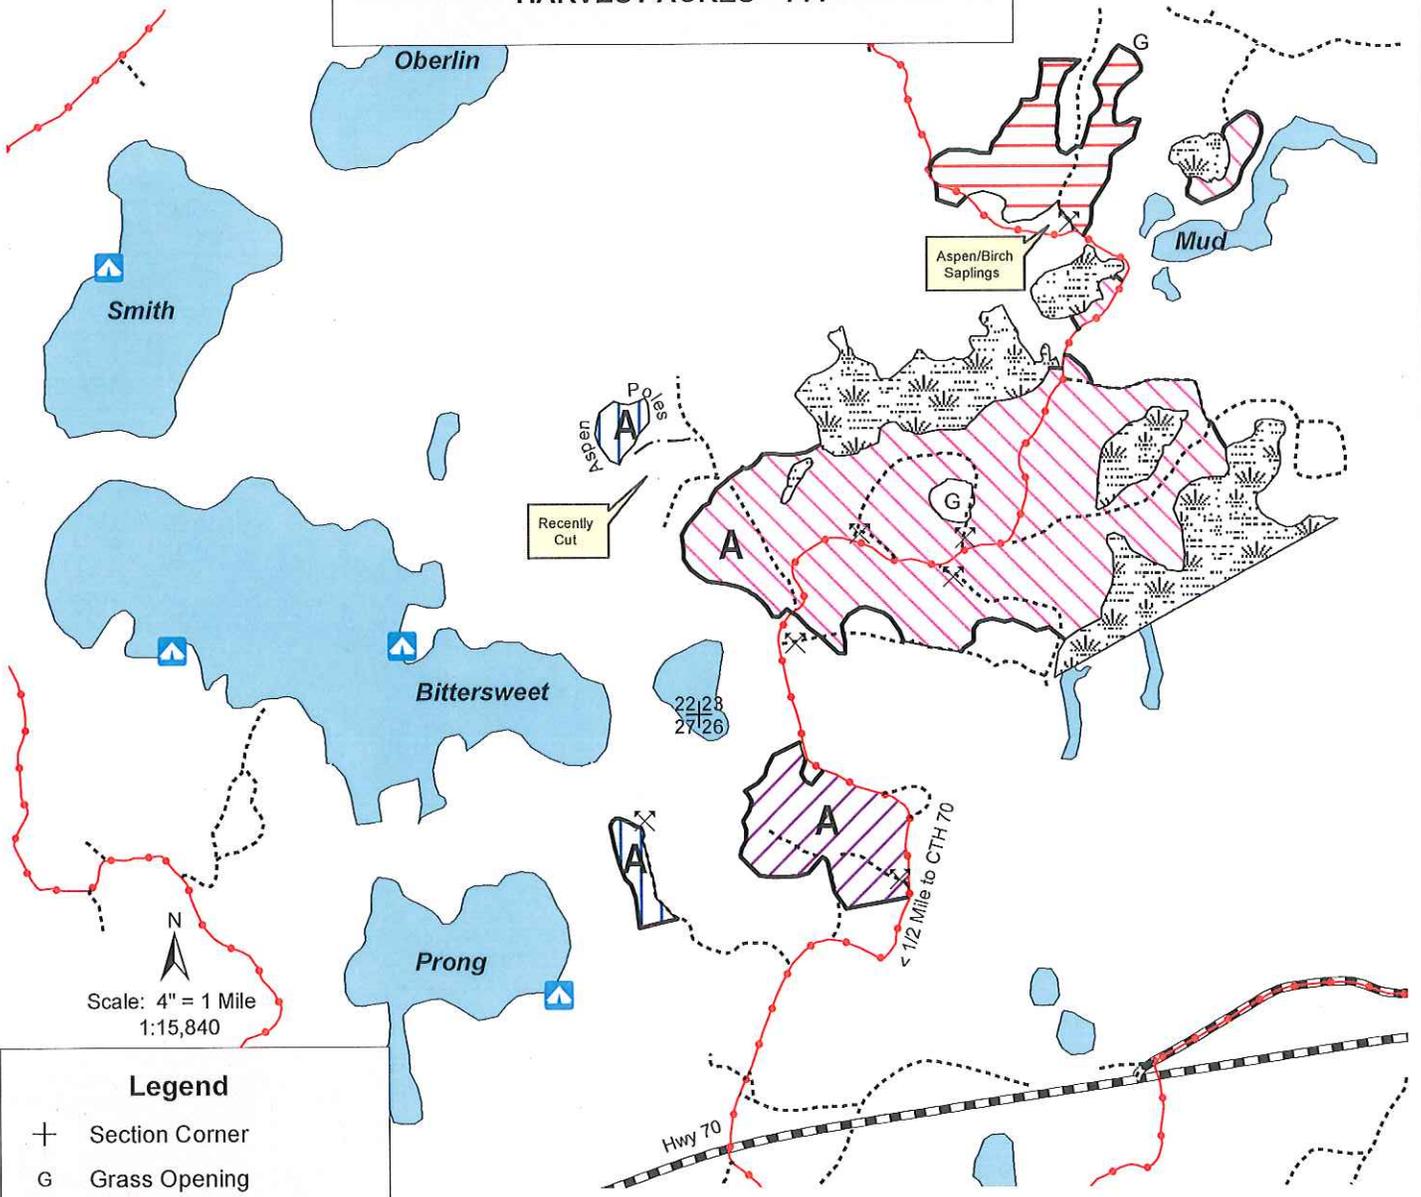

**Legend**

- + Section Corner
- G Grass Opening
- ⊗ Berms
- ▲ Remote Campsites
- Red Line
- · - · Skid Trail
- - - - Woods Roads
- - - - Snowmobile Trail
- ▬ Highways and Town Roads
- ⊠ Keg
- Lakes

- Orange Marked Rec Area (6 Acres); Cut all orange marked trees.
- Green Marked Rec Oak Area (19 Acres): Cut all trees except red & white pine and those trees marked with green paint.
- Mixed FP Area (19 Acres): Cut all balsam fir, jack pine, maple and orange marked trees. Also cut all aspen and birch with three or more pulp sticks.
- Mixed Pine Area (100 Acres): Same Prescription as Mixed FP Area.

**Note: Seasonal Restriction: All Harvesting activity permitted ONLY from the Tuesday after Labor Day - April 15, in Zone A, as depicted on sale map. Hours of equipment operation are from 6 a.m. to 9 p.m. within 1/2 mile of Bittersweet & Prong Lakes. Do NOT cut trees with an orange "X"**

Area 5 - Big Arbor Vitae Loamy Hills - Forest Production Area  
 Area 11 - Red & White Pine - Native Community Area  
 Area 21 - Bittersweet - Recreation Management Area